

Improving **Security** and
Surveillance performance.
For a Smarter, Safer world.

PRODUCT GUIDE
2025-H1



About Us

We are **WISELINE**

We aim to be a leader in video surveillance, as we develop and supply innovative network solutions that improve security and surveillance performance.

At Wiseline Technology, we build and connect safety and security technologies in our never-ending pursuit to help keep people safer everywhere. Because we're all at our best when we feel safe. We build and connect technologies to help protect people, property and places, enabling critical collaboration between public safety agencies and enterprises for a proactive approach to safety and security.


The most advanced and technology-driven Security Solutions is what Wiseline Technology strives to provide. These systems can integrate large amounts of data to produce valuable and insightful information. Users can do advanced inspection, analysis and interpretation, thanks to the system solutions. Videos are currently the fastest-growing data category due to their capacity to boost productivity and the effectiveness of search capabilities. With the aid of our video management systems, which have the unique ability to give recorded data with outstanding accuracy, you can use surveillance video data for security.

Our company specializes in providing our valued customers with a range of products ranging from the latest technology solutions in CCTV Cameras, Recorders, Video Intercoms, Biometrics, X-Ray Baggage Scanners, Cabling Solutions, 4G/ WiFi Solutions, Solar Energy Solutions and allied accessories. We continuously embark on introducing some of the newest surveillance methodologies that elevate existing security conditions to impenetrable security styles.

Security **Solutions** For Every Business

Right for you today. And tomorrow.



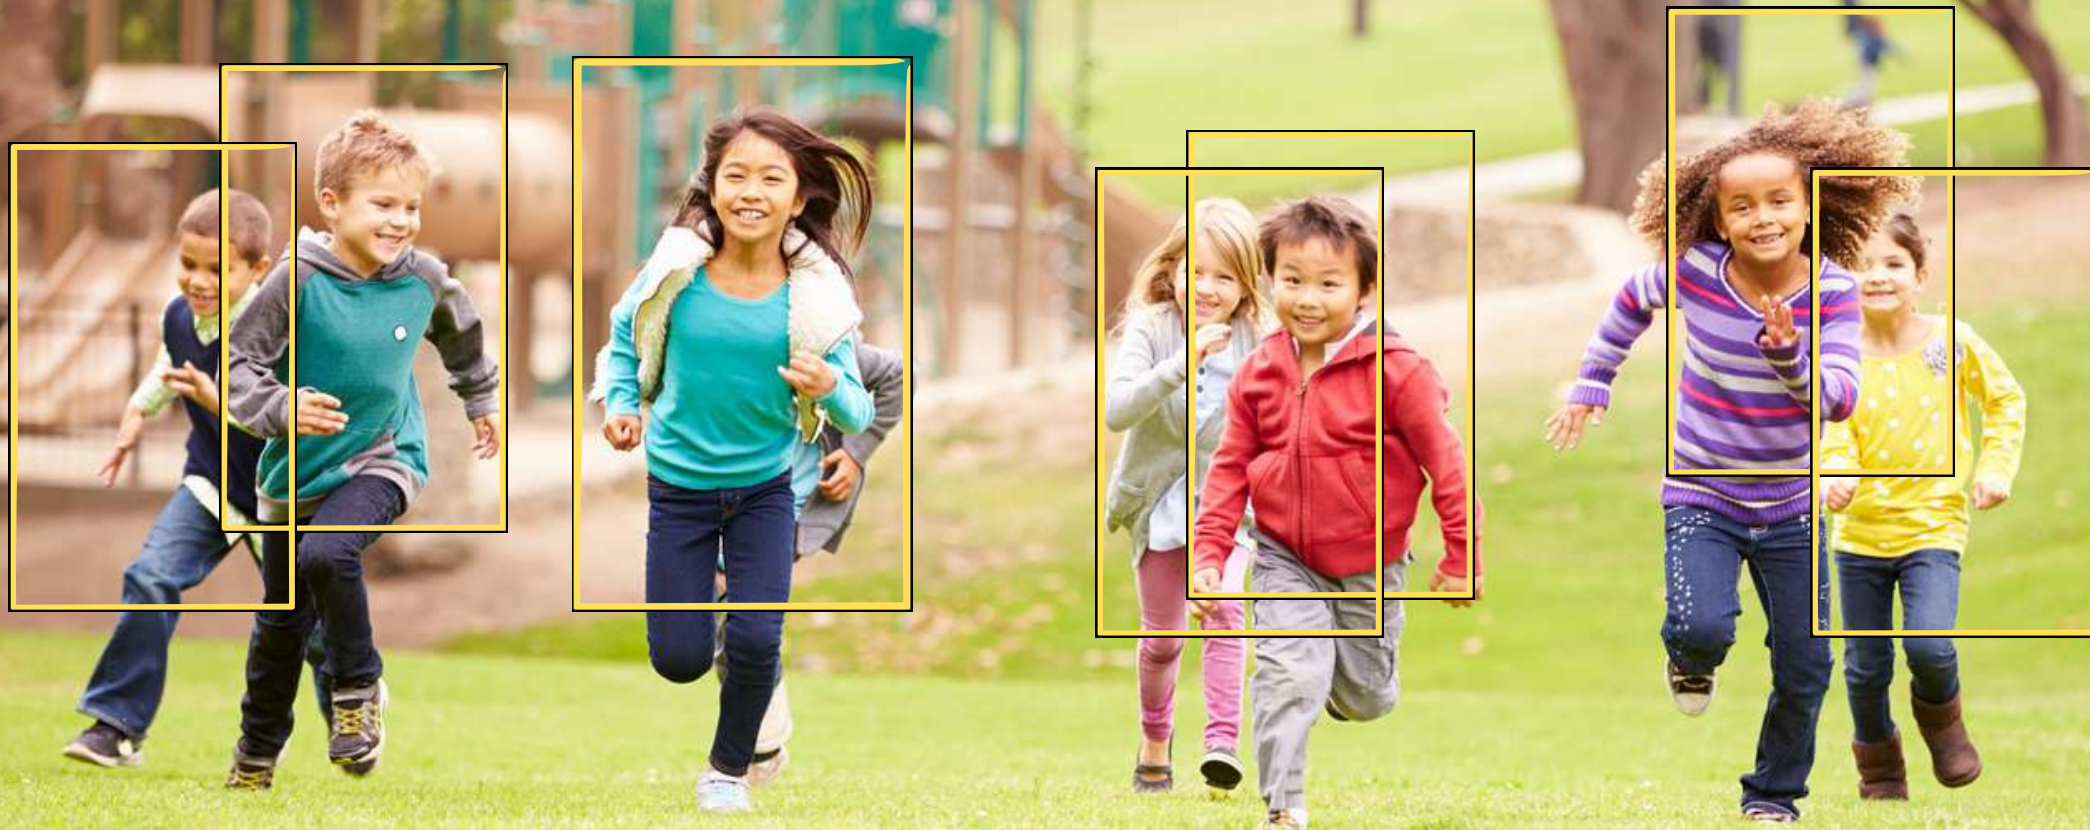

Transition to the era of **Artificial Intelligence.**

A New Perspective on
Surveillance.





3MP Dual-Light 2-Way Audio
Metal Dome Camera



3MP Dual-Light 2-Way Audio
Metal Bullet Camera



4MP Dual-Light 2-Way Audio
Metal Dome Camera



4MP Dual-Light 2-Way Audio
Metal Bullet Camera

Model	WND-3020A-DLS	WNO-3020A-DLS	WND-4020A-DLS	WNO-4020A-DLS
Imaging Device	1/2.9" low illumination CMOS	1/2.9" low illumination CMOS	1/2.7", low illumination CMOS	1/2.7", low illumination CMOS
Resolution/ Max. Frame Rate	3MP / 20fps	3MP / 20fps	4MP / 20fps	4MP / 20fps
Min. Illumination	Color: 0.003Lux (F1.6), 0Lux with light/ IR	Color: 0.003Lux (F1.6), 0Lux with light/ IR	Color: 0.003Lux (F1.6), 0Lux with light/ IR	Color: 0.003Lux (F1.6), 0Lux with light/ IR
Focal Length	2.8mm (3.6mm/ 4mm optional)	4mm (2.8mm/ 3.6mm optional)	2.8mm (3.6mm/ 4mm optional)	4mm (2.8mm/ 3.6mm optional)
Day & Night	Auto (ICR)	Auto (ICR)	Auto (ICR)	Auto (ICR)
Supplemental Light	Dual Light	Dual Light	Dual Light	Dual Light
Illumination Distance (IR)	30m	30m	30m	30m
Illumination Distance (Warm Light)	20m	20m	20m	20m
Image Setting	Brightness / contrast / sharpness / saturation / chroma	Brightness / contrast / sharpness / saturation / chroma	Brightness / contrast / sharpness / saturation / chroma	Brightness / contrast / sharpness / saturation / chroma
Digital Noise Reduction	3D DNR	3D DNR	3D DNR	3D DNR
Mirror	Off / horizontal mirroring / vertical mirroring / 180 ° rotation	Off / horizontal mirroring / vertical mirroring / 180 ° rotation	Off / horizontal mirroring / vertical mirroring / 180 ° rotation	Off / horizontal mirroring / vertical mirroring / 180 ° rotation
Human Detection	Yes, Detects 5 people at the same time	Yes, Detects 5 people at the same time	Yes, Detects 5 people at the same time	Yes, Detects 5 people at the same time
Audio Type	Two-way Audio Intercom	Two-way Audio Intercom	Two-way Audio Intercom	Two-way Audio Intercom
Audio In/ Out	Built-in Mic. & Speaker	Built-in Mic. & Speaker	Built-in Mic. & Speaker	Built-in Mic. & Speaker
Audio Coding Standard	G.711U/64Kbps	G.711U/64Kbps	G.711U/64Kbps	G.711U/64Kbps
Network Protocol	TCP/IP, UDP, HTTP, HTTPS, DHCP, RTSP, DDNS, NTP, PPPOE, UPNP, SMTP	TCP/IP, UDP, HTTP, HTTPS, DHCP, RTSP, DDNS, NTP, PPPOE, UPNP, SMTP	TCP/IP, UDP, HTTP, HTTPS, DHCP, RTSP, DDNS, NTP, PPPOE, UPNP, SMTP	TCP/IP, UDP, HTTP, HTTPS, DHCP, RTSP, DDNS, NTP, PPPOE, UPNP, SMTP
Interface Protocol	ONVIF, Wiseline Private Protocol	ONVIF, Wiseline Private Protocol	ONVIF, Wiseline Private Protocol	ONVIF, Wiseline Private Protocol
Power Supply	PoE/ 12V DC	PoE/ 12V DC	PoE/ 12V DC	PoE/ 12V DC
Protection	IP66/ IP67	IP66/ IP67	IP66/ IP67	IP66/ IP67
Operation Temp./ Humidity	-30 °C ~ 60 °C (-22 °F ~ 140°F), Humidity: ≤95% RH (non-condensing)	-30 °C ~ 60 °C (-22 °F ~ 140°F), Humidity: ≤95% RH (non-condensing)	-30 °C ~ 60 °C (-22 °F ~ 140°F), Humidity: ≤95% RH (non-condensing)	-30 °C ~ 60 °C (-22 °F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Material	Metal	Metal	Metal	Metal



**5MP IR 2-Way Audio
Vandal Dome Camera**



**5MP Dual-Light 2-Way Audio
Metal Bullet Camera**



**5MP Dual-Light 2-Way Audio
Metal Bullet Camera**



**6MP Dual-Light 2-Way Audio
Vari-Focal Bullet Camera**

Model	WND-5020A-VPS	WNO-5020A-DLS	WNO-5050A-DLS	WNO-6050AZ-DLS
Imaging Device	1/2.7" low illumination CMOS	1/2.7" low illumination CMOS	1/2.7" low illumination CMOS	1/2.7" low illumination CMOS
Resolution/ Max. Frame Rate	5MP / 20fps	5MP / 20fps	5MP / 20fps	6MP / 25fps
Min. Illumination	Color: 0.003Lux (F1.6), 0Lux with IR	Color: 0.003Lux (F1.6), 0Lux with light/ IR	Color: 0.003Lux (F1.6), 0Lux with light/ IR	Color: 0.003Lux (F1.6), 0Lux with light/ IR
Focal Length	2.8mm (3.6mm/ 4mm optional)	4mm (2.8mm/ 3.6mm optional)	6mm (2.8mm/ 4mm optional)	2.7 ~ 13.5mm (5x) motorized lens
Day & Night	Auto (ICR)	Auto (ICR)	Auto (ICR)	Auto (ICR)
Supplemental Light	IR LEDs	Dual Light	Dual Light	Dual Light
Illumination Distance (IR)	30m	30m	50m	60m
Illumination Distance (Warm Light)	NA	20m	30m	40m
Image Setting	Brightness / contrast / sharpness / saturation / chroma	Brightness / contrast / sharpness / saturation / chroma	Brightness / contrast / sharpness / saturation / chroma	Brightness / contrast / sharpness / saturation / chroma
Wide Dynamic Range (WDR)	dWDR	dWDR	dWDR	True WDR 130dB (Off/Low/Middle/High)
Digital Noise Reduction	3D DNR	3D DNR	3D DNR	3D DNR
Mirror	Off / horizontal mirroring / vertical mirroring / 180 ° rotation	Off / horizontal mirroring / vertical mirroring / 180 ° rotation	Off / horizontal mirroring / vertical mirroring / 180 ° rotation	Off / horizontal mirroring / vertical mirroring / 180 ° rotation
Artificial Intelligence	Built-in human detection algorithm	Built-in human detection algorithm	Built-in human detection algorithm	Human detection, Area Intrusion, Line-Crossing detection, Loitering, Absent Alarm, Vehicle Illegal Parking, Vehicle Retrograde
Human Detection	Yes, Detects 5 people at the same time	Yes, Detects 5 people at the same time	Yes, Detects 5 people at the same time	Yes, Detects 5-10 people at the same time
Audio Type	Two-way Audio Intercom	Two-way Audio Intercom	Two-way Audio Intercom	Two-way Audio Intercom
Audio In/ Out	Built-in Mic. & Speaker	Built-in Mic. & Speaker	Built-in Mic. & Speaker	Built-in Mic. & Speaker
Audio Coding Standard	G.711u/ G.711A 64Kbps	G.711u/ G.711A 64Kbps	G.711u/ G.711A 64Kbps	G.711u/ G.711A 64Kbps
SD-Card	Support, max 512G	Support, max 512G	NA	Support, max 512G
Network Protocol	TCP/IP, UDP, HTTP, HTTPS, DHCP, RTSP, DDNS, NTP, PPPOE, UPNP, SMTP, P2P	TCP/IP, UDP, HTTP, HTTPS, DHCP, RTSP, DDNS, NTP, PPPOE, UPNP, SMTP, P2P	TCP/IP, UDP, HTTP, HTTPS, DHCP, RTSP, DDNS, NTP, PPPOE, UPNP, SMTP, P2P	TCP/IP, UDP, HTTP, HTTPS, DHCP, PPPoE, HTTP, HTTPS, RTSP, RTMP, DDNS, UPNP, FTP, P2P
Interface Protocol	ONVIF, Wiseline Private Protocol, P2P	ONVIF, Wiseline Private Protocol, P2P	ONVIF, Wiseline Private Protocol, P2P	ONVIF, Wiseline Private Protocol, P2P
Power Supply	PoE/ 12V DC	PoE/ 12V DC	PoE/ 12V DC	PoE/ 12V DC
Protection	IP66/ IP67, IK10	IP66/ IP67	IP66/ IP67	IP66/ IP67
Operation Temp./ Humidity	-30 °C ~ 60 °C (-22 °F ~ 140°F), Humidity: ≤95% RH (non-condensing)	-30 °C ~ 60 °C (-22 °F ~ 140°F), Humidity: ≤95% RH (non-condensing)	-30 °C ~ 60 °C (-22 °F ~ 140°F), Humidity: ≤95% RH (non-condensing)	-30 °C ~ 60 °C (-22 °F ~ 140°F), Humidity: ≤95% RH (non-condensing)
Material	Metal	Metal	Metal	Metal

5MP High Definition
with **Super Dark** Vision



Wiseline Super Dark Camera

Conventional IR Camera



Built-in MIC + SPEAKER
For 2-Way Audio Intercom

5Megapixel SUPER DARK



**5MP SUPER DARK 2-Way
Audio Metal Bullet Camera**

Model	WNO-SD5050A-S
Imaging Device	1/1.8" low illumination CMOS
Resolution/ Max. Frame Rate	5MP / 25fps
Min. Illumination	Color: 0.0003Lux (F1.0), 0Lux with light
Focal Length	F1.0, 6mm (2.8mm/ 4mm optional)
Day & Night	Auto (ICR)
Supplemental Light	Warm Light
Illumination Distance (Warm Light)	50m
Illumination Distance (IR)	NA
Image Setting	Brightness / contrast / sharpness / saturation / chroma
Wide Dynamic Range (WDR)	Digital WDR
Digital Noise Reduction	3D DNR
Mirror	Off / horizontal mirroring / vertical mirroring / 180 ° rotation
Artificial Intelligence	Human detection, Area Intrusion, Line-Crossing detection, Loitering, Absent Alarm, Vehicle Illegal Parking, Vehicle Retrograde
Human Detection	Yes, Detects 5-10 people at the same time
Audio Type	Two-way Audio Intercom
Audio In/ Out	Built-in Mic. & Speaker
Audio Coding Standard	G.711u/ G.711A 64Kbps
SD-Card	Support, max 512G
Network Protocol	TCP/IP, UDP, HTTP, HTTPS, DHCP, RTSP, RTMP, DDNS, NTP, PPPOE, UPNP, SMTP, P2P
Interface Protocol	ONVIF, Wiseline Private Protocol, P2P
Power Supply	PoE/ 12V DC
Protection	IP66/ IP67
Operation Temp./ Humidity	-30 °C ~ 60 °C (-22 °F ~ 140°F), Humidity: ≤95% RH
Material	Metal



Improving **Security** and
Surveillance performance
For a smarter, safer world

25x
Super Zoom

Available in 6MP & 8MP High Resolution



Built-in MIC + SPEAKER
For 2-Way Audio Intercom



6MP 25X PTZ Camera



8MP 25X PTZ Camera

Model	WNP-6025A-150RS	WNP-8025A-150RS
Imaging Device	1/2.7" low illumination CMOS	1/2.7" low illumination CMOS
Resolution/ Max. Frame Rate	6MP / 25fps	8MP / 20fps
Min. Illumination	Color: 0.003Lux (F1.6), 0 Lux with IR	Color: 0.003Lux (F1.6), 0 Lux with IR
Focal Length	4.44mm ~ 111mm, 25X Optical Zoom	4.44mm ~ 111mm, 25X Optical Zoom
Angle of View	57.4 ~ 2.7 degree (Wide-Tele)	57.4 ~ 2.7 degree (Wide-Tele)
Day & Night	Auto ICR Color to B/W	Auto ICR Color to B/W
Rotation speed	0.05°~245°/second	0.05°~245°/second
Horizontal Range	0°~360° continuously	0°~360° continuously
Vertical Range	-15°~90° (105°)	-15°~90° (105°)
Supplemental Light	6 Pcs Array LEDs + 4 Pcs Laser Lights	6 Pcs Array LEDs + 4 Pcs Laser Lights
Illumination Distance (IR)	150M	150M
Image Setting	Brightness / contrast / sharpness / saturation / chroma	Brightness / contrast / sharpness / saturation / chroma
Wide Dynamic Range (WDR)	True WDR 130dB (Off/Low/Middle/High)	True WDR 130dB (Off/Low/Middle/High)
Digital Noise Reduction	3D DNR	3D DNR
Mirror	Off / horizontal mirroring / vertical mirroring / 180 ° rotation	Off / horizontal mirroring / vertical mirroring / 180 ° rotation
Artificial Intelligence	Auto Tracking, Active Defense, Cross-border detection, Vehicle reversal, Personnel leaving their posts, Personnel staying, Area intrusion, and Vehicle illegal parking	Auto Tracking, Active Defense, Cross-border detection, Vehicle reversal, Personnel leaving their posts, Personnel staying, Area intrusion, and Vehicle illegal parking
Human Detection	Support	Support
Audio Type	Two-way Audio Intercom	Two-way Audio Intercom
Audio In/ Out	Built-in Mic. & Speaker	Built-in Mic. & Speaker
Audio Coding Standard	G.711u/ G.711A 64Kbps	G.711u/ G.711A 64Kbps
SD-Card	Support, max 512G	Support, max 512G
Network Protocol	TCP/IP, UDP, HTTP, HTTPS, DHCP, RTSP, DDNS, NTP, PPPoE, UPNP, SMTP, P2P	TCP/IP, UDP, HTTP, HTTPS, DHCP, RTSP, DDNS, NTP, PPPoE, UPNP, SMTP, P2P
Interface Protocol	ONVIF, Wiseline Private Protocol, P2P	ONVIF, Wiseline Private Protocol, P2P
Power Supply	DC12V or POE ++	DC12V or POE ++
Protection	IP66/ IP67, IK10, 6000V lightning protection	IP66/ IP67, IK10, 6000V lightning protection
Operation Temp./ Humidity	-30 °C ~ 60 °C (-22 °F ~ 140 °F), Humidity: ≤95% RH	-30 °C ~ 60 °C (-22 °F ~ 140 °F), Humidity: ≤95% RH
Material	Metal	Metal


2MP VF ANPR Camera


4MP VF ANPR Camera

Model	WNO-2060T-LPD	WNO-4080T-LPD
Image Sensor	1 / 2.8" CMOS	1 / 1.8" CMOS
Resolution / Image Size	2MP, 1920 × 1080	4MP, 2592 × 1520
Min. Illumination	0.005 lux@F1.6, AGC ON; 0 lux with IR	0 lux with LED ON
Focal Length	7~22mm@F1.6, motorized	8~32mm@F1.6, motorized
Angle of View	H: 44°~17.6°; V: 25.6°~10°; D: 49.7°~20.2°	H: 41°~15.5°; V: 23°~9.5°; D: 46.5°~18°
Day & Night	Auto ICR Color to B/W	Auto ICR Color
Supplemental Light	IR	White Light
Illumination Distance (IR)	70~100m	NA
Ill. Distance (Warm Light)	NA	70~100m
Wide Dynamic Range (WDR)	120dB True WDR	120dB True WDR
LPR Snapshot	Overview and cutout of plate for picture	Original image (4MP resolution) and license plate image
Vehicle Plate Database	10,000	10,000
Capture Speed Range	0~60km/h	0~120km/h
Audio	1CH audio input; 1CH audio output	1CH audio input; 1CH audio output
Storage	Network remote storage; micro SD card storage (256Gb)	Network remote storage; micro SD card storage (256Gb)
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTMP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP, HTTP POST, 802.1x, UPnP, HTTPs, QoS	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTMP, RTCP, PPPoE, DDNS, SMTP, FTP, SNMP, HTTP POST, 802.1x, UPnP, HTTPs, QoS
Intelligent Analytics	Video blur detection, video color cast detection, scene change detection, license plate recognition	Video blur detection, video color cast detection, scene change detection, license plate recognition
Security	Video encryption, firmware encryption, HTTPs encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/HTTPs	Video encryption, firmware encryption, HTTPs encryption, configuration encryption, illegal login lock, IP address filtering, 802.1x authentication, basic and digest authentication for HTTP/HTTPs
Smart Alarm	Motion detection, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection	Motion detection, sensor alarm, SD card error, SD card full, IP address conflict, cable disconnection
Power Supply	DC12V/PoE	DC24V/ AC24V/ PoE
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F); Humidity: less than 95 % (non condensing)	- 30 °C ~ 60 °C (-22°F~140°F); Humidity: less than 95 % (non-condensing)

For Valuable Vehicle Intelligence




Automated Number Plate Recognition



High Performance ANPR Cameras.

Available in 2MP & 4MP

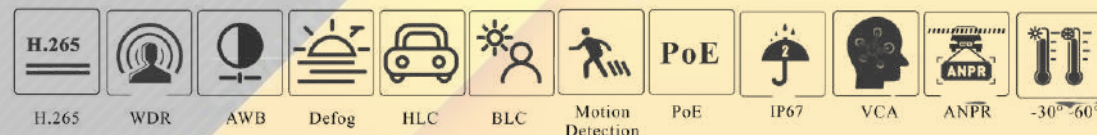

Network Video Recorders



4CH PoE 4K NVR



- Embedded Linux operating system.
- 4CH Support 8MP/5MP/ 4MP/3MP/1080P.
- H.264/ H.265/ S.265 Video Compression.
- Supports 1 SATA HDD upto 8TB.
- 4K resolution HDMI output.
- Supports ONVIF & P2P Cloud Service.
- Supports Humanoid Detection.
- Backup via USB/ LAN.
- 2 x USB 2.0 Ports.
- 4 x PoE Ports for Camera Connection.
- Audio In/ Out ports.

WHR-5104P-R

8CH PoE 4K NVR



- Embedded Linux operating system.
- 8CH Support 8MP/5MP/ 4MP/3MP/1080P.
- H.264/ H.265/ S.265 Video Compression.
- Supports 1 SATA HDD upto 8TB.
- 4K resolution HDMI output.
- Supports ONVIF & P2P Cloud Service.
- Supports Humanoid Detection.
- Backup via USB/ LAN.
- 2 x USB 2.0 Ports.
- 8 x PoE Ports for Camera Connection.
- Audio In/ Out ports.

WHR-5108P-R


10CH 4K Non-PoE NVR



- Embedded Linux operating system.
- 10CH Support 8MP/5MP/ 4MP/3MP/1080P.
- H.264/ H.265/ S.265 Video Compression.
- Supports 1 SATA HDD upto 8TB.
- 4K resolution HDMI output.
- Supports ONVIF & P2P Cloud Service.
- Supports Humanoid Detection.
- Backup via USB/ LAN.
- 2 x USB 2.0 Ports.
- Audio In/ Out ports.

WNR-1001M

16CH 4K Non-PoE NVR



- Embedded Linux operating system.
- 16CH Support 8MP/5MP/4MP/3MP/1080P.
- H.264/ H.265/ S.265 Video Compression.
- Supports 1 SATA HDD upto 8TB.
- 4K resolution HDMI output.
- Supports ONVIF & P2P Cloud Service.
- Supports Humanoid Detection.
- Backup via USB/ LAN.
- 2 x USB 2.0 Ports.
- Audio In/Out ports.

WNR-1601M

8CH NVR for ANPR Camera


ANPR



- Embedded Linux operating system.
- 8CH Support 6MP/5MP/4MP/3MP/1080P.
- H.264/ H.265/ H.265+ Video Compression.
- Supports 1 SATA HDD upto 10TB each.
- Full HD resolution HDMI output.
- Supports ONVIF & P2P Cloud Service.
- ANPR Support with Plate Detection.
- Backup via USB/ LAN.
- 2 x USB 2.0 Ports.

WNR-2108-LPD

32CH Non-PoE NVR



- Embedded Linux operating system.
- 32CH Support 8MP/5MP/4MP/3MP/1080P.
- H.264/ H.265/ H.265+ Video Compression.
- Supports 2 SATA HDD upto 8TB each.
- 1080P resolution HDMI output.
- Supports ONVIF & P2P Cloud Service.
- Supports Humanoid Detection.
- Backup via USB/ LAN.
- 2 x USB 2.0 Ports.

WNR-3202K

32CH UHD 4K Non-PoE NVR



- Embedded Linux operating system.
- 32CH Support 8MP/5MP/4MP/3MP/1080P.
- H.264/ H.265/ H.265+ Video Compression.
- Supports 2 SATA HDD upto 8TB each.
- 3840 x 2160 4K resolution HDMI output.
- Supports ONVIF & P2P Cloud Service.
- Supports Basic Detection features.
- Backup via USB/ LAN.
- 2 x USB 2.0 Ports.

WNR-3202K-R

64CH 4*SATA UHD 4K Non-PoE NVR



- Embedded Linux operating system.
- 64CH Support 8MP/5MP/4MP/3MP/1080P.
- H.264/ H.265/ H.265+ Video Compression.
- Supports 4 SATA HDD upto 8TB each.
- 3840 x 2160 4K resolution HDMI output.
- Supports ONVIF & P2P Cloud Service.
- Supports Basic Detection features.
- Backup via USB/ LAN.
- 2 x USB 2.0 & 1 x USB 3.0 Ports.

WNR-6404K-R

64CH 9xSATA Non-PoE NVR



- Embedded Linux operating system.
- 64CH Support 8MP/5MP/4MP/3MP/1080P.
- H.264/ H.265/ S.265 Video Compression.
- Supports 9 SATA HDD upto 16TB each.
- 4K resolution HDMI output.
- Supports ONVIF & P2P Cloud Service.
- Supports AI Functions.
- 2 x 1000Mbps RJ45 LAN Ports.
- 3 x USB 2.0 Ports.

WNR-6409K

128CH 16xSATA Non-PoE NVR



- Embedded Linux operating system.
- 128CH Support 12MP/8MP/5MP/4MP/3MP/1080P.
- H.264/ H.265/ S.265 Video Compression.
- Supports 16 SATA HDD upto 16TB each.
- Upto 8K resolution output with 4 x HDMI Ports.
- Supports ONVIF & P2P Cloud Service.
- Supports AI Functions.
- 2 x 1000Mbps RJ45 LAN Ports.
- 3 x USB 2.0 Ports.

WNR-128-16K

196CH 16xSATA Non-PoE NVR



- Embedded Linux operating system.
- 196CH Support 12MP/8MP/5MP/4MP/3MP/1080P.
- H.264/ H.265/ S.265 Video Compression.
- Supports 16 SATA HDD upto 16TB each.
- Upto 8K resolution output with 4 x HDMI Ports.
- Supports ONVIF & P2P Cloud Service.
- Supports AI Functions.
- 2 x 1000Mbps RJ45 LAN Ports.
- 3 x USB 2.0 Ports.

WNR-196-16K



ANALOG KILLER

AK 3MP Audio Dual-Light Dome Camera



- 1/2.8" CMOS Image Sensor.
- 3MP HD Resolution Camera.
- 20 FPS @ 2304 x 1296.
- 3 x Smart Dual-Light LEDs for upto 20mtr Night Vision.
- 3.6mm Fixed Lens.
- 3D-DNR, OSD & Privacy Masking.
- Built-in Microphone.
- Humanoid Detection, ONVIF.
- POE RJ45/ DC 12V 2A.
- Elegant Plastic Housing.

WND-AK3020A-DL

AK 3MP Audio Dual-Light Bullet Camera



- 1/2.8" CMOS Image Sensor.
- 3MP HD Resolution Camera.
- 20 FPS @ 2304 x 1296.
- 4 x Smart Dual-Light LEDs for upto 30mtr Night Vision.
- 4mm Fixed Lens.
- 3D-DNR, OSD & Privacy Masking.
- Built-in Microphone.
- Humanoid Detection, ONVIF.
- POE RJ45/ DC 12V 2A.
- Elegant Plastic Housing.

WNO-AK3020A-DL

Value Network Cameras

3MP Audio IR Dome Camera



- 1/2.9" CMOS Image Sensor.
- 3MP HD Resolution Camera.
- 20 FPS @ 2304 x 1296.
- 3 x New Generation Array LEDs for upto 20mtr Night Vision.
- 3.6mm Fixed Lens.
- 3D-DNR, OSD & Privacy Masking.
- Built-in Microphone.
- Humanoid Detection, ONVIF.
- POE RJ45/ DC 12V 2A.
- Elegant Plastic Housing.

WND-3020A-L28

3MP Audio IR Bullet Camera



- 1/2.9" CMOS Image Sensor.
- 3MP HD Resolution Camera.
- 20 FPS @ 2304 x 1296.
- 2 x Smart Array LEDs for upto 20mtr IR.
- 4mm Fixed Lens.
- 3D-DNR, OSD & Privacy Masking.
- Built-in Microphone.
- Humanoid Detection, ONVIF.
- POE RJ45/ DC 12V 2A.
- Elegant Plastic Housing.

WNO-3020A-L28

3MP Audio Color Dome Camera



- 1/2.9" CMOS Image Sensor.
- 3MP HD Resolution Camera.
- 20 FPS @ 2304 x 1296.
- 2 x Smart Warm LEDs for upto 20mtr Colour Night Vision.
- 3.6mm Fixed Lens.
- 3D-DNR, OSD & Privacy Masking.
- Built-in Microphone.
- Humanoid Detection, ONVIF.
- POE RJ45/ DC 12V 2A.
- Elegant Plastic Housing.

WND-3020A-CL28

3MP Audio Color Bullet Camera



- 1/2.9" CMOS Image Sensor.
- 3MP HD Resolution Camera.
- 20 FPS @ 2304 x 1296.
- 2 x Smart White LEDs for upto 20mtr Colour Night Vision.
- 4mm Fixed Lens.
- 3D-DNR, OSD & Privacy Masking.
- Built-in Microphone.
- Humanoid Detection, ONVIF.
- POE RJ45/ DC 12V 2A.
- Elegant Plastic Housing.

WNO-3020A-CL28

4MP Audio IR Dome Camera



- 1/2.7" Progressive CMOS Image Sensor.
- 4MP HD Resolution Camera.
- 20 FPS @ 2560 x 1440.
- 3 x New Generation Array LEDs for upto 20mtr Night Vision.
- 3.6mm Fixed Lens.
- 3D-DNR, OSD & Privacy Masking.
- Built-in Microphone.
- Humanoid Detection, ONVIF.
- POE RJ45/ DC 12V 2A.
- Elegant Plastic Housing.

WND-4020A-L28

4MP Audio IR Bullet Camera



- 1/2.7" Progressive CMOS Image Sensor.
- 4MP HD Resolution Camera.
- 20 FPS @ 2560 x 1440.
- 2 x Smart Array LEDs for upto 20mtr IR.
- 4mm Fixed Lens.
- 3D-DNR, OSD & Privacy Masking.
- Built-in Microphone.
- Humanoid Detection, ONVIF.
- POE RJ45/ DC 12V 2A.
- Elegant Plastic Housing.

WNO-4020A-L28

5MP 25X IR PTZ Camera



- 1/2.8" CMOS Image Sensor.
- 5MP Resolution, 25X PTZ Camera.
- 20 FPS @ 2560 x 1920.
- 3 x Smart Array LEDs for upto 50mtr IR Range.
- 2 x Laser Smart LEDs for upto 150mtr IR Range.
- 4.2-105mm Optical Zoom Lens, 16X Digital Zoom.
- 3D-DNR, dWDR, P2P, Park Mode.
- 360 Degree Scan, Presets, Tour, Auto Flip functions.
- ONVIF & P2P Function.
- POE RJ45/ DC 12V 3A.
- Elegant IP66 Housing.

WNP-5025-150R

5MP 36X IR PTZ Camera



- 1/2.8" CMOS Image Sensor.
- 5MP Resolution, 36X PTZ Camera.
- 20 FPS @ 2560 x 1920.
- 3 x Smart Array LEDs for upto 50mtr IR Range.
- 2 x Laser Smart LEDs for upto 200mtr IR Range.
- 4.2-152mm Optical Zoom Lens, 16X Digital Zoom.
- 3D-DNR, dWDR, P2P, Park Mode.
- 360 Degree Scan, Presets, Tour, Auto Flip functions.
- ONVIF & P2P Function.
- POE RJ45/ DC 12V 3A.
- Elegant IP66 Housing.

WNP-5036-150R

8MP 5X AD PTZ Camera



- 1/2.7" CMOS Image Sensor.
- 8MP Resolution, 5X PTZ Camera.
- 20 FPS @ 4K 3840(H)x2160(V)
- 4 x Smart Array LEDs for upto 50mtr IR Range.
- 2.7-13.5mm 5X Optical Zoom Lens.
- Built-in Mic & Speaker for 2-Way Audio.
- 3D-DNR, dWDR, P2P, Park Mode.
- 360 Degree Scan, Presets, Tour, Auto Flip functions.
- ONVIF & P2P Function.
- POE RJ45/ DC 12V 2A.
- Elegant IP66 Housing.

WNP-8004-50R

2MP 25X IR PTZ Camera



- 1/2.7" Progressive Scan CMOS Image Sensor.
- 2MP Resolution, 25X PTZ Camera.
- 30 FPS @ 1920x1080.
- Smart IR Range upto 150mtr.
- 5-125mm Optical Zoom Lens, 16X Digital Zoom.
- 3D-DNR, True WDR, Privacy Masking.
- 360 Degree Scan, Presets, Tour, Auto Flip function.
- ONVIF, 3D Positioning, Patrol Scan.
- Audio (In/Out), Alarm (In/Out), 256Gb SD Card Slot.
- POE / DC 12V 2A.
- Elegant IP66 Housing.

WNP-2025-150R

5MP 33X IR PTZ Camera



- 1/2.7" CMOS Image Sensor.
- 5MP Resolution, 33X PTZ Camera.
- 25 FPS @ 2592 x 1944.
- 3 x Smart Array LEDs for upto 50mtr IR Range.
- 2 x Laser Smart LEDs for upto 250mtr IR Range.
- 4.3-142mm Optical Zoom Lens, 16X Digital Zoom.
- 3D-DNR, WDR, P2P, Park Mode.
- 360 Degree Scan, Presets, Tour, Auto Flip functions.
- ONVIF & P2P Function.
- POE+ RJ45/ DC 12V 3A.
- Elegant IP66 Housing.

WNP-5036-250R

2MP 25X IR PTZ Camera



- 1/2.7" CMOS Image Sensor.
- 2MP Resolution, 25X PTZ Camera.
- 30 FPS @ 1920 x 1080.
- 3 x Smart Array LEDs for upto 50mtr IR Range.
- 2 x Laser Smart LEDs for upto 200mtr IR Range.
- 5-125mm Optical Zoom Lens, 16X Digital Zoom.
- 3D-DNR, WDR, P2P, Park Mode.
- 360 Degree Scan, Presets, Tour, Auto Flip functions.
- ONVIF & P2P Function.
- POE+ RJ45/ DC 12V 3A.
- Elegant IP66 Housing.

WNP-2025-200R



Analog & 4G/ WiFi Cameras

2MP HD Dome Camera



- 1/3" Image Sensor.
- 2MP HD Resolution Camera.
- 25/30FPS @ 2MP.
- 6 x New Generation Array LEDs for upto 30mtr Night Vision.
- 3.6mm Fixed Lens.
- TVI/ AHD/ CVI/ CVBS Video Output.
- Elegant Plastic Housing.

WAD-2020-L28

2MP HD Bullet Camera



- 1/3" Image Sensor.
- 2MP HD Resolution Camera.
- 25/30FPS @ 2MP.
- 6 x New Generation Array LEDs for upto 30mtr Night Vision.
- 3.6mm Fixed Lens.
- TVI/ AHD/ CVI/ CVBS Video Output.
- Durable Metal Housing.

WAB-2030-L28

2MP HD Audio Dome Camera



- 1/2.9" Image Sensor.
- 2MP HD Resolution Camera.
- 25/30FPS @ 2MP.
- 3 x New Generation Array LEDs for upto 20mtr Night Vision.
- 3.6mm Fixed Lens.
- TVI/ AHD/ CVI/ CVBS Video Output.
- Built-in Microphone.
- Elegant Plastic Housing.

WAD-2020A-L28

2MP HD Audio Bullet Camera



- 1/2.9" Image Sensor.
- 2MP HD Resolution Camera.
- 25/30FPS @ 2MP.
- 2 x Smart Array LEDs for upto 20mtr Night Vision.
- 3.6mm Fixed Lens.
- TVI/ AHD/ CVI/ CVBS Video Output.
- Built-in Microphone.
- Elegant Plastic Housing.

WAB-2020A-L28

2MP HD Color Audio Dome Camera



- 1/2.9" Image Sensor.
- 2MP HD Resolution Camera.
- 25/30FPS @ 2MP.
- 2 x Smart Warm LEDs for upto 20mtr Colour Night Vision.
- 3.6mm Fixed Lens.
- TVI/ AHD/ CVI/ CVBS Video Output.
- Built-in Microphone.
- Elegant Plastic Housing.

WAD-2020A-CL28

2MP HD Color Audio Bullet Camera



- 1/2.9" Image Sensor.
- 2MP HD Resolution Camera.
- 25/30FPS @ 2MP.
- 2 x Smart White LEDs for upto 20mtr Colour Night Vision.
- 3.6mm Fixed Lens.
- TVI/ AHD/ CVI/ CVBS Video Output.
- Built-in Microphone.
- Elegant Plastic Housing.

WAB-2020A-CL28

5MP HD Audio Dome Camera



- 1/2.9" Image Sensor.
- 5MP HD Resolution Camera.
- 5MP @ 20/12.5FPS.
- 3 x New Generation Array LEDs for upto 20mtr Night Vision.
- 3.6mm Fixed Lens.
- TVI/ AHD/ CVI/ CVBS Video Output.
- Built-in Microphone.
- Elegant Plastic Housing.

WAD-5020A-L28

5MP HD Audio Bullet Camera



- 1/2.9" Image Sensor.
- 5MP HD Resolution Camera.
- 5MP @ 20/12.5 FPS.
- 2 x Smart Array LEDs for upto 20mtr Night Vision.
- 3.6mm Fixed Lens.
- TVI/ AHD/ CVI/ CVBS Video Output.
- Built-in Microphone.
- Elegant Plastic Housing.

WAB-5020A-L28

5MP HD Color Audio Dome Camera



- 1/2.9" Image Sensor.
- 5MP HD Resolution Camera.
- 5MP @ 20/12.5 FPS.
- 2 x Smart Warm LEDs for upto 20mtr Colour Night Vision.
- 3.6mm Fixed Lens.
- TVI/ AHD/ CVI/ CVBS Video Output.
- Built-in Microphone.
- Elegant Plastic Housing.

WAD-5020A-CL28

5MP HD Color Audio Bullet Camera



- 1/2.9" Image Sensor.
- 5MP HD Resolution Camera.
- 5MP @ 20/12.5FPS.
- 2 x Smart White LEDs for upto 20mtr Colour Night Vision.
- 3.6mm Fixed Lens.
- TVI/ AHD/ CVI/ CVBS Video Output.
- Built-in Microphone.
- Elegant Plastic Housing.

WAB-5020A-CL28

4MP 4G Solar PT Camera



- Solar Based 4G PT Camera.
- 4MP HD Resolution.
- Micro SD Card Slot upto 256Gb.
- 30mtr Colour Night View & Smart IR.
- 4mm Fixed Lens.
- 7W Solar Panel & 15600mAh Battery.
- Two Way Audio with in-built Mic. & Speaker.
- Human Motion Detection, PIR Detection.
- IP66, weatherproof.

W4GS-4030A-DL

3MP 4G Dual-Light Bullet Camera



- 4G Bullet Dual-Light Camera.
- 3MP HD Resolution.
- Micro SD Card Slot upto 256Gb.
- 30mtr Colour Night View & Smart IR.
- 4mm Fixed Lens.
- 10X Digital Zoom & dWDR.
- Two Way Audio with in-built Mic. & Speaker.
- Human Motion Detection.
- IP66, weatherproof.
- 12V/1A DC Power Input & Reset Button

W4GB-3030A-DL

3MP 4G Dual-Light Dome Camera



- 4G Dome Dual-Light Camera.
- 3MP HD Resolution.
- Micro SD Card Slot upto 256Gb.
- 20mtr Colour Night View & Smart IR.
- 4mm Fixed Lens.
- 10X Digital Zoom & dWDR.
- Two Way Audio with in-built Mic. & Speaker.
- Human Motion Detection.
- IP66, weatherproof.
- 12V/1A DC Power Input & Reset Button

W4GD-3020A-DL

3MP WiFi Smart Outdoor PT Camera



- WiFi Based Outdoor PT Camera.
- 3MP HD Resolution.
- Micro SD Card Slot upto 256Gb.
- 30mtr Colour Night View & Smart IR.
- 4mm Fixed Lens.
- 10 Presets to monitor favorite locations.
- Two Way Audio with in-built Mic. & Speaker.
- Human Motion Detection & Tracking.
- RJ45 LAN interface, ONVIF/ RTSP.
- DC 12V 1A, <15W power consumption.
- IP66, weatherproof.

WPTW-3030-CL40

3MP WiFi Smart Indoor PT Camera



- WiFi Based Indoor PT Camera.
- 3MP HD Resolution.
- Micro SD Card Slot upto 256Gb.
- Night Vision upto 10mtr with Smart IR.
- 3.6mm Fixed Lens.
- WiFi connection & Bluetooth configuration.
- Two Way Audio with in-built Mic. & Speaker.
- Works with Alexa, Supports Cloud Recording.
- Human Motion Detection & Tracking.
- DC 5V 1A, <3W power consumption.

WRPW-3010-L36

Digital Video Recorders

4CH 5MP Lite DVR



- Embedded Linux operating system.
- 4CH BNC Input TVI/ AHD/ CVI/ CVBS/ IP.
- 5MP Lite, 4MP Lite, 1080P @ 20FPS.
- H.265/ H.264 Video Compression.
- 1 SATA HDD upto 8TB.
- Audio over co-axial cable (AOC).
- 1080P resolution HDMI output.
- Backup via USB/ LAN.
- 2 x USB 2.0 Ports.

WHR-2104M-R

8CH 5MP Lite DVR



- Embedded Linux operating system.
- 8CH BNC Input TVI/ AHD/ CVI/ CVBS/ IP.
- 5MP Lite, 4MP Lite, 1080P @ 12FPS.
- H.265/ H.264 Video Compression.
- 1 SATA HDD upto 8TB.
- Audio over co-axial cable (AOC).
- 1080P resolution HDMI output.
- Backup via USB/ LAN.
- 2 x USB 2.0 Ports.

WHR-2108M-R

16CH 5MP Lite DVR



- Embedded Linux operating system.
- 16CH BNC Input TVI/ AHD/ CVI/ CVBS/ IP.
- 5MP Lite, 4MP Lite, 1080P @ 12FPS.
- H.265/ H.264 Video Compression.
- 1 SATA HDD upto 8TB.
- Audio over co-axial cable (AOC).
- 1080P resolution HDMI output.
- Backup via USB/ LAN.
- 2 x USB 2.0 Ports.

WHR-2016M-R

4CH 8MP Lite DVR



- Embedded Linux operating system.
- 4CH BNC Input TVI/ AHD/ CVI/ CVBS/ IP.
- 8MP @ 15FPS, 5MP @ 20FPS.
- H.265/ H.264 Video Compression.
- 1 SATA HDD upto 8TB.
- Audio over co-axial cable (AOC).
- 3840 x 2160 4K resolution HDMI output.
- Backup via USB/ LAN.
- 2 x USB 2.0 Ports.

WHR-7104M-R

8CH 8MP Lite DVR



- Embedded Linux operating system.
- 8CH BNC Input TVI/ AHD/ CVI/ CVBS/ IP.
- 8MP @ 15FPS, 5MP @ 20FPS.
- H.265/ H.264 Video Compression.
- 1 SATA HDD upto 8TB.
- Audio over co-axial cable (AOC).
- 3840 x 2160 4K resolution HDMI output.
- Backup via USB/ LAN.
- 2 x USB 2.0 Ports.

WHR-7108M-R

16CH 8MP Lite DVR



- Embedded Linux operating system.
- 16CH BNC Input TVI/ AHD/ CVI/ CVBS/ IP.
- 8MP @ 15FPS, 5MP @ 20FPS.
- H.265/ H.264 Video Compression.
- 2 SATA HDD upto 8TB each.
- Audio over co-axial cable (AOC).
- 3840 x 2160 4K resolution HDMI output.
- Backup via USB/ LAN.
- 2 x USB 2.0 Ports.

WHR-7216M-R

4CH 2MP Lite DVR



- Embedded Linux operating system.
- 4CH BNC Input TVI/ AHD/ CVI/ CVBS/ IP.
- 2MP Lite, 1080N @ 20FPS.
- H.265/ H.264 Video Compression.
- 1 SATA HDD upto 6TB.
- Audio over co-axial cable (AOC).
- 1080P resolution HDMI output.
- Backup via USB/ LAN.
- 2 x USB 2.0 Ports.

WHR-1104M-R

8CH 2MP Lite DVR



- Embedded Linux operating system.
- 8CH BNC Input TVI/ AHD/ CVI/ CVBS/ IP.
- 2MP Lite, 1080N @ 20FPS.
- H.265/ H.264 Video Compression.
- 1 SATA HDD upto 6TB.
- Audio over co-axial cable (AOC).
- 1080P resolution HDMI output.
- Backup via USB/ LAN.
- 2 x USB 2.0 Ports.

WHR-1108M-R

Power Supply & PoE Switches

8+2 Giga-Uplink PoE Switch



- 1-8 Port: 10/100Mbps RJ45 PoE ports.
- Up-Link: 2 x 10/100/1000Mbps Base-T.
- IEEE 802.3/ 802.3i/802.3u/802.3af/at/bt.
- On Surveillance Mode, supports 200mtr.
- Backplane bandwidth: 11.2Gbps.
- Full metal housing.
- In-built power supply.
- Total Power: 150W
- AC 240V Input.

WPS-0802GU

8+2 10/100Mbps PoE Switch



- 1-8 Port: 10/100Mbps RJ45 PoE ports.
- Up-Link: 2 x 10/100Mbps RJ45.
- IEEE 802.3/ 802.3i/802.3u/802.3af/at/bt.
- On Surveillance Mode, supports 200mtr.
- Backplane bandwidth: 1Gbps.
- Full metal housing.
- In-built power supply.
- Total Power: 96W
- AC 240V Input.

WPS-0802M-ISP

4+2 10/100Mbps PoE Switch



- 1-4 Port: 10/100Mbps RJ45 PoE ports.
- Up-Link: 2 x 10/100Mbps RJ45.
- IEEE 802.3/ 802.3i/802.3u/802.3af/at/bt.
- On Surveillance Mode, supports 200mtr.
- Full metal housing.
- In-built power supply.
- Total Power: 96W
- AC 240V Input.

WPS-0402M-ISP

8-CH 12V Single Output PSU



- 08-Channel 12V Power Supply.
- High efficiency & reliability.
- Overload & Overheat Protection.
- Single output for easy installation.
- Elegant Metal Body Structure.
- AC 240V Input.

WPSM-1208S

4-CH 12V Single Output PSU



- 04-Channel 12V Power Supply.
- High efficiency & reliability.
- Overload & Overheat Protection.
- Single output for easy installation.
- Elegant Metal Body Structure.
- AC 240V Input.

WPSM-1204S

16CH Dual Output PSU



- 16-Channel Power Supply.
- Voltage Booster Technology.
- Overload & Overheat Protection.
- Dual output for Load Balancing.
- Elegant solid plastic housing.
- Can be used as car battery charger.
- Adjustable output of 12V/ 14V/ 16V.
- AC 240V Input.

WPSM-1216M

3+1 Co-Axial CCTV Cable

Astra 3+1 Co-Axial CCTV Cable



- 3+1 co-axial CCTV Cable.
- Good Quality PVC material.
- Video: 0.45mm Copper.
- Power: 3 x (0.08mm x 14) Copper.
- Available in 70m/ 81m/ 90m.
- Elegant Design Box Packing.

ASTRA CCTV Cable

Royal 3+1 Co-Axial CCTV Cable



- 3+1 co-axial CCTV Cable.
- FRPVC (Fresh & Virgin).
- Video: 0.51mm Copper.
- Power: 3 x (0.093mm x 14) Copper.
- 90mtr Length.
- Elegant Design Box Packing.

WL-FC90M-RCAC

Astra Outdoor 3+1 CCTV Cable



- 3+1 co-axial CCTV Cable.
- FRPVC with LDE weatherproof shield.
- Video: 0.45mm Copper.
- Power: 3 x (0.08mm x 14) Copper.
- Available in 81m/ 90Y.
- Elegant Design Box Packing.

WL-FC90Y-OD



HDTV PREMIUM

HIGH SPEED HDTV CABLE
HDTV 2.0 STANDARD TRANSMISSION LINE



Length;
1.5 Mtr., 3 Mtr.
5 Mtr., 10 Mtr.
15 Mtr.

60
4K@60Hz

18
Gbps

3D
4K Ultra 3D

2160P
Ultra HD 2160P

High Durability Premium HDMI Cables

HIGH DEFINITION MULTIMEDIA INTERFACE

Network Cables & Accessories

Royal Indoor Cat6 Cable



Royal Cat6

- 24AWG Solid Copper UTP Cable.
- FRPVC (Fresh & Virgin).
- 4 Pairs of 0.51mm Copper.
- RIP Cord & Spacer for extra support.
- 305mtr Length.
- Elegant Design Box Packing.

WL-FC305M-RUTP

ASTRA Indoor CCA Cat6 Cable



Astra Cat6

- 24AWG CCA UTP Cable.
- FRPVC (Fresh & Virgin).
- 4 Pairs of 0.51mm CCA.
- RIP Cord & Spacer for extra support.
- 305mtr Length.
- Elegant Design Box Packing.

WL-CCA305M-AUTP

Royal Outdoor Cat6 Cable (305m)



Outdoor Royal Cat6

- Solid Copper UTP Cable.
- FRPVC with LDE weatherproof shield.
- 4 Pairs of 0.48mm Copper.
- RIP Cord & Spacer for extra support.
- 305mtr Length.
- Elegant Design Reel Packing.

WL-FC305M-OD

Royal Outdoor Cat6 Cable (100m)



Outdoor Royal Cat6

- Solid Copper UTP Cable.
- FRPVC with LDE weatherproof shield.
- 4 Pairs of 0.48mm Copper.
- RIP Cord & Spacer for extra support.
- 100mtr Length.
- Elegant Design Box Packing.

WL-FC100M-OD

Electric Rim Lock



Electric Rim Lock

- High strength Stainless Steel Lock.
- Brass cylinders & Roller Latch.
- Comes with 5no's computerized keys.
- Comes with Rubber handle cover.
- Works on DC12V, 1.5A-3A.
- Reliable Locking Mechanism.

WL-ERL-5SKTL

4G Sim-Based Router



- Sim-Based Network Router.
- Supports 5G Sim of all networks*.
- Triple Antenna for Wider WiFi Range.
- RJ45 Port for direct LAN connection.
- Plug-n-Play for Easy Internet Connection.
- Easy & User Friendly GUI.
- Elegant & Portable Design.

WL-5GSR-3A1L

10/100Mbps Media Converter



- Ethernet To Fiber Media Converter.
- Single-Mode 10/100Base-TX to 100Base-FX.
- RJ45 To SC connection.
- Full metal body fan-less design.
- Comes in a pair within box pack.
- Adaptors included in the box.

WL-MC100MR

10/100/1000 Mbps Gigabit Media Converter



- Full Gigabit Media Converter.
- Ethernet To Fiber Media Converter.
- Single-Mode 10/100/1000Base-TX to 1000Base-FX.
- RJ45 To SC connection.
- Full metal body fan-less design.
- Comes in a pair within box pack.
- Adaptors included in the box.

WL-MC1000GR

Smart Video Intercom Systems

Elegant Designs, Best Performance.



Safeguard Your Homes
With Best-in-Class Video Door Phones


Security **Solutions** For Every Business

Right for you today. And tomorrow.



Wiseline Technology Pvt Ltd

Info@wiselinetechnology.com
Sales@wiselinetechnology.com
Support@wiselinetechnology.com
www.wiselinetechnology.com



Wiseline end-to-end solutions for surveillance.