


Model: WL-10TMSD-256GSL

SMART VIDEO DOORPHONE





Internet WiFi

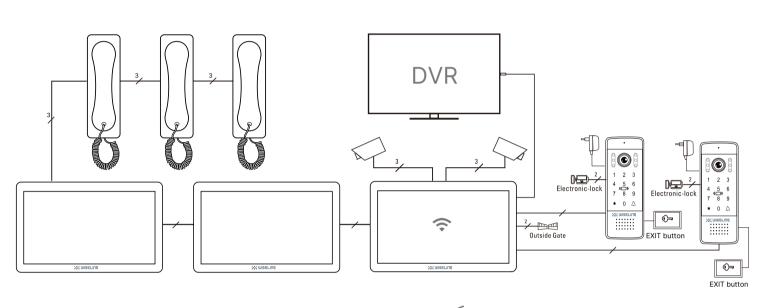









Wide Angle







HD

1080P HD

App-Based



Remote Screenshot & Video



Night Vision



Transfer



Dormant



256GB TF card (optional)



Motion-Sensing



10"



Intercom



IC card Unlock



Password Unlock



Unlock



See, Hear and Speak to Visitors from Anywhere







1080P FHD Doorbell

- * Built-in 2 Mega HD camera
- * More clear than 800TVL and 1200TVL



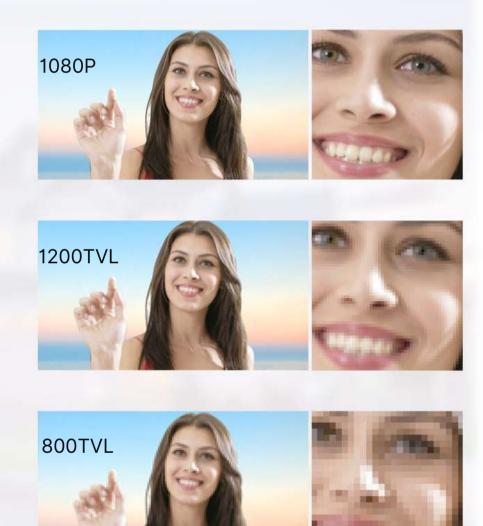

Indoor unit Supports Dormant Mode

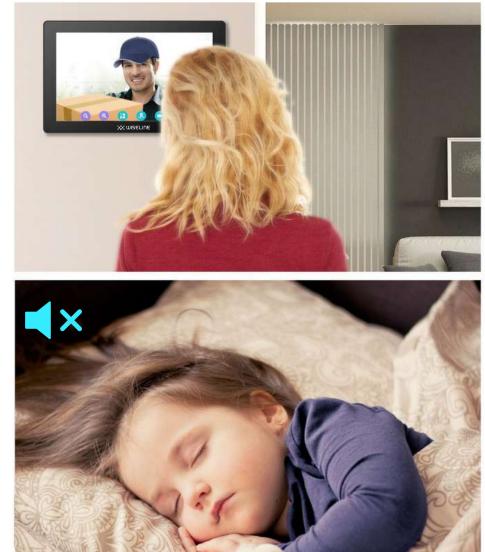





Multiple ways to access the villa








1. Indoor unit


2. SMARTPHONE

3. ACCESS CODE



4. RFID CARD AND BADGE

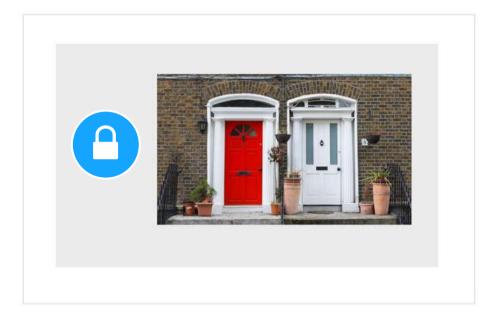

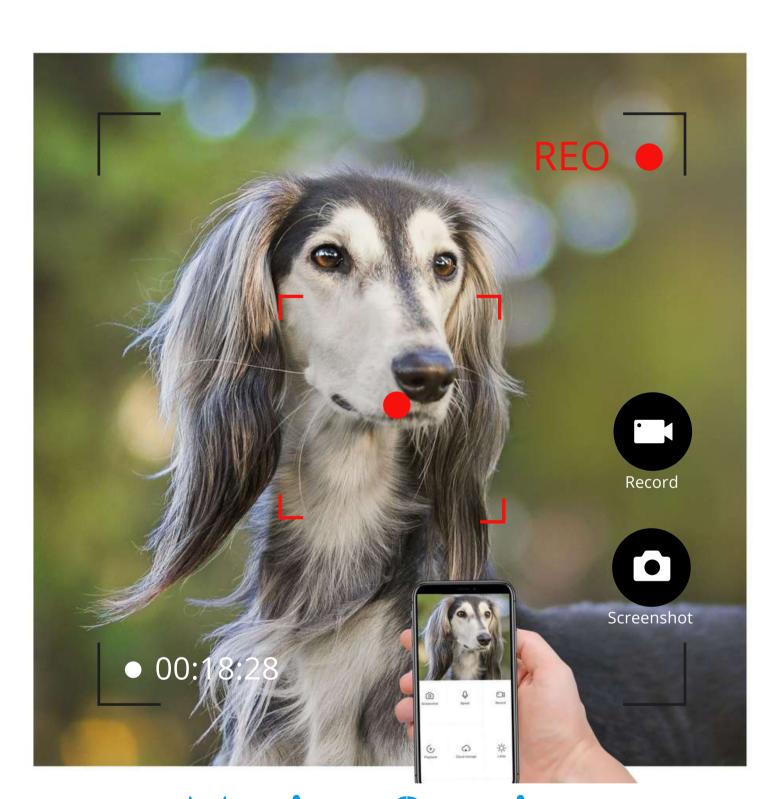

Motion-Sensing





Weatherproof Suitable for outdoor use




Night Vision camera Capture clear image even at night





Motion Detection

Uses AI to identify humans and filter moving things that are not humans

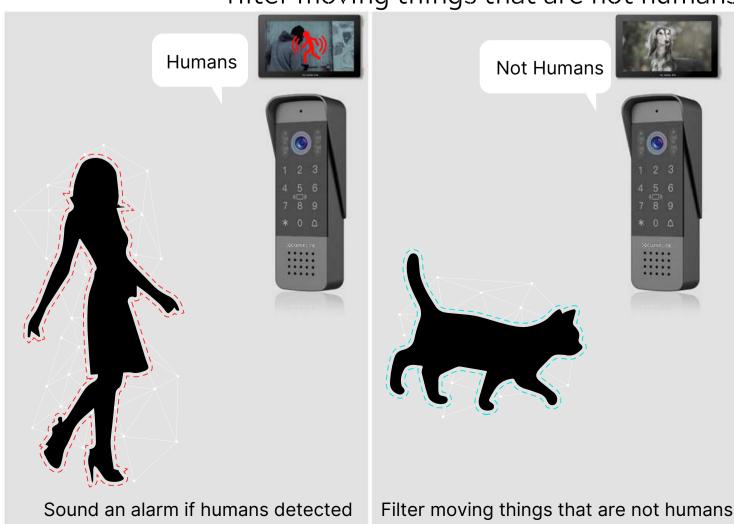







1080P

172 mm

Schedule video recording when going out

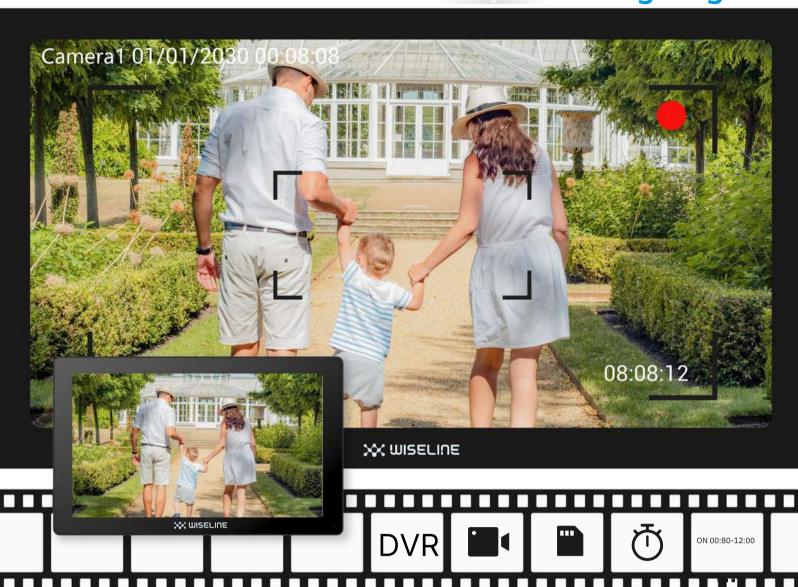

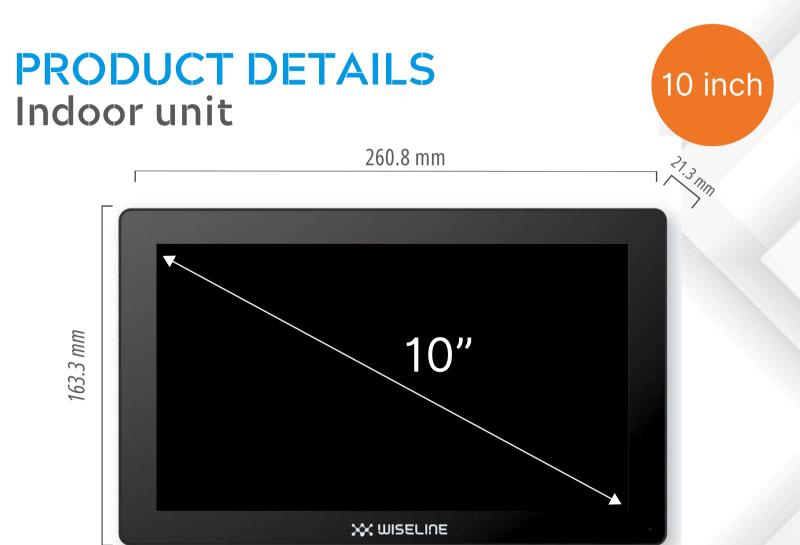

PRODUCT DETAILS





Easy 4-wire connection



Multiple Unit Connection

Between Indoor & Outdoor Units






3

Multiple Unit Connection

Between Indoor & Indoor Units

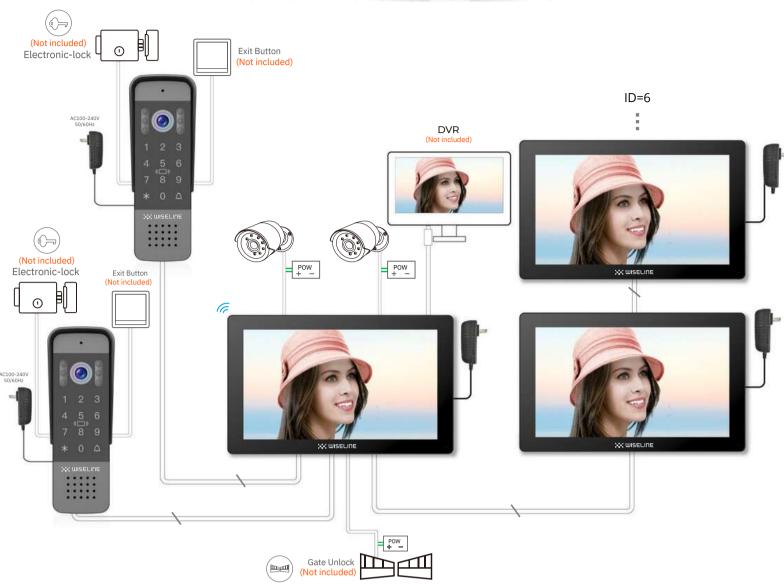


Dual Band WiFi 6 + Ethernet Cable Connection

2.4GHz WiFi & 5.0 GHz WiFi network configuration.
Support wired network connection when the Wi-Fi signal is weak





Suitable for Various Environments

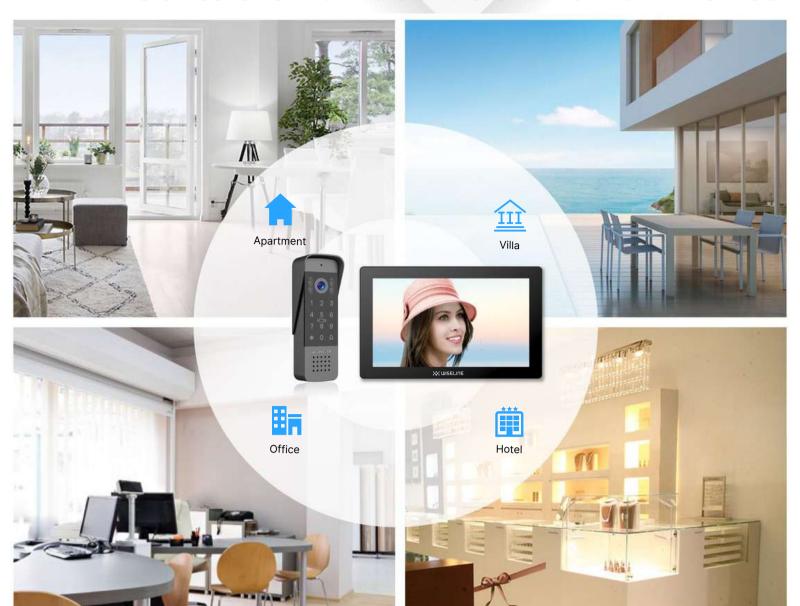

Productc Specifications

Indoor unit

Indoor unit			
Adapter	Input: AC100-240V Output: DC12V 2A		
Power Consumption	Static State<2W, Working State<9W		
Wireless Network	Frequency: 2.4GHz & 5GHz protocol: 802.11a/b/g/n/ac/ax		
TF card	16GB/32GB/64GB (FAT format) 128GB/256GB (exFAT format) >=CLASS 10		
Video	Video input	AHD (default) /TVI/CVI/CVBS	
	Pixels	2.0MP (default) 1.3MP, 1.0MP, 800TVL	
Motion detection	1 of 4 channels can be detected		
LCD dimension	10.1" MIPI interface		
Resolution	1024*600		
Ring/talk volume	75~85dB (30cm)		
Video Recording	MOV format		
Recording Type	Circulation		
Outline Size	260(W)*162(H)*25(D)mm		
Operating environment	Temperature -10 C ~ 50 C°		
	Humidity 10	0% ∼90% (RH)	



Outdoor unit

Camera	2 million pixels
Power Consumption	Static State<0.5W, Working State<6W
Material	Aluminium + glass panel
Lock Connection	No additional power supply needed
Viewing Angle	Horizontal 120°
Touch type	Capacitive touch
Night vision LED	650/940/850nm
Talk Volume	(optional) ≈80dB
Unlock Method	 Tap unlock button on screen during talking Password Exit button IC card
Outline Size	172(H)*67W)*39(D) mm
Operating Temperature	-20°C~50°C
Relative Humidity	10%~90% (RH)

